


MONTAGESCHEMA P.C.P. AFSLUITING

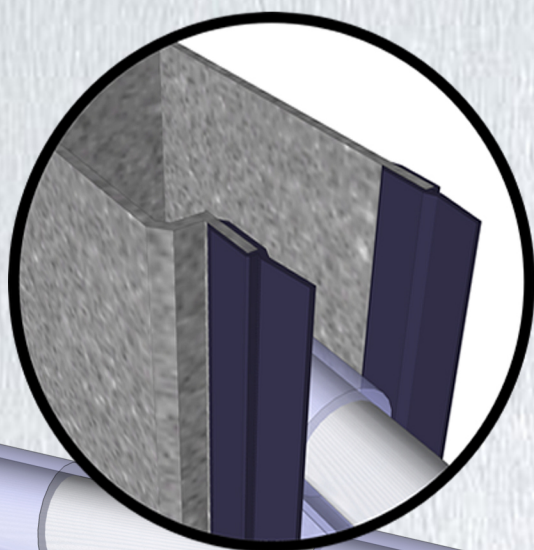


Afmetingen mm

Hoogte	Kas
2500	350

3500	
4000	380

Weight : 8 kg/m²

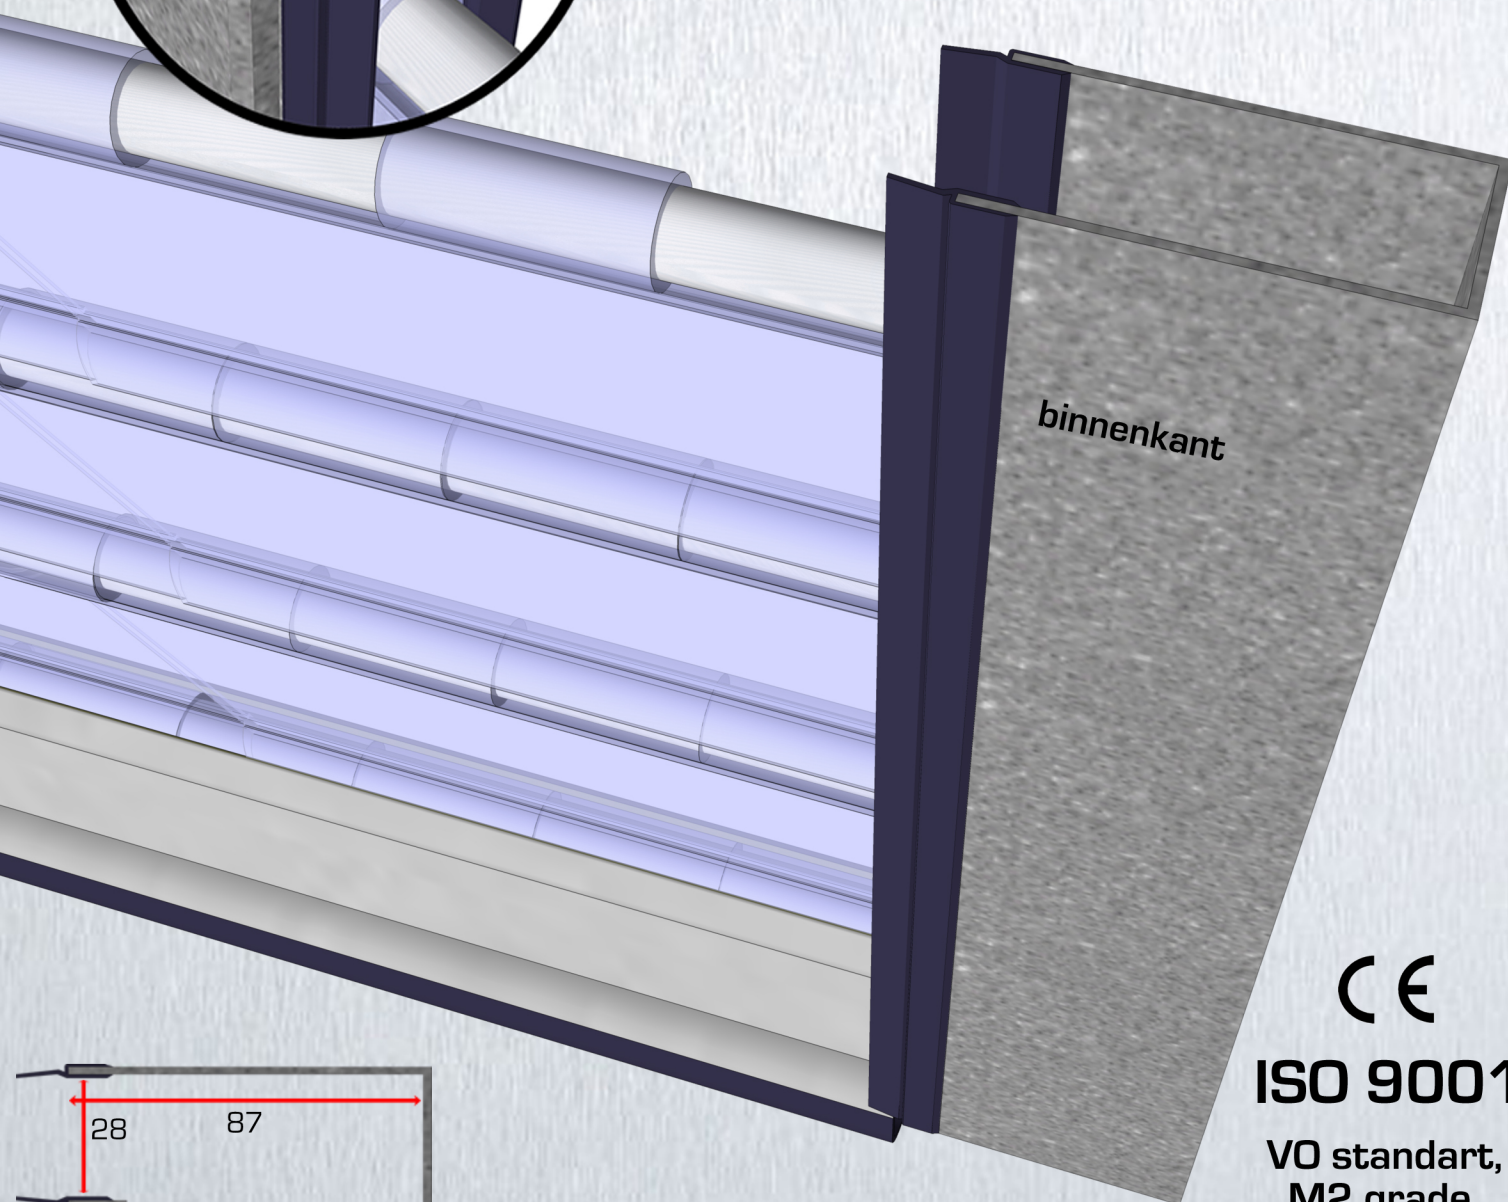

ISO 9001

VO standart,
M2 grade
of non flammability

**POSITIVE ACTION SERVICE
COMPANY**

1220 North Market Street,
suite 606 Wilmington
DE 19801 DELAWARE - U.S.A.
pas@terrific-force.com
Phone-Fax : 1770 234 4094

**GROUPE DIFFUS'EST
S.A.S.**

73 rue d'Epinal
88100 SAINT-DIE - FRANCE
info@terrific-force.com
Tél : 33 (0) 329 563 346
Fax: 33 (0) 329 565 470

